

PMA

NEW SIZES PMA65 | PMA125

HIGH PRESSURE
MULTISTAGE
HORIZONTAL PUMPS

AXIAL SUCTION

Sizes from-to	DNm 65 DNm 125
Flow Rate up to	110 l/s
Head up to	1000 m
Suction port	PN40
Delivery port	PN40 (PMA)
	PN63 (PMAS)
	PN100 (PMAH)
Rotation speed (rpm)	1.450 - 3.500

IDEAL FOR


SNOWMAKING

WATER SUPPLY

INDUSTRIAL APPLICATIONS


FIRE-FIGHTING


IRRIGATION

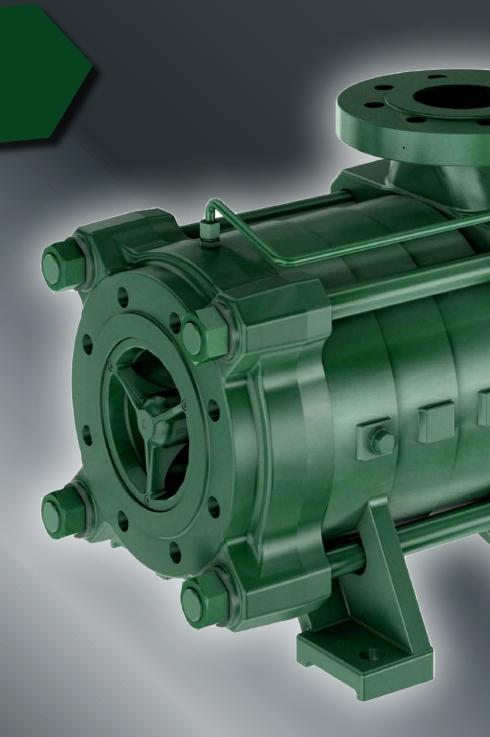



PMA65

PMA125









3 2 1

WHY CHOOSE PMA?

1 PRESSURE UP TO 100 BAR

- Impellers with axial thrust compensation system
- High thicknesses of the casting components and high performance materials

2 HIGH ENERGY SAVING

- High-efficiency hydraulics: best in class efficiency
- Performance guaranteed over time: replaceable wear rings

3 REDUCED INSTALLATION COSTS

- Simple installation: suction casing axial to the pipeline
- Easy pump-motor alignment: innovative baseframes

4 LOW NPSH VALUES

- · Reduces the risk of cavitation
- Reliable operation even in lifting installations

5 EASY MAINTENANCE

- Reduced maintenance: grease lubricated bearing on the delivery side
- Quick replacement of the sleeve and bushing from the suction side

Now available for order



