










50 Hz 5 6 7 8 10 30 40 60 80100 Q[m3/h] 400 600 75 70 60 55 50 H [ft] 30 **DN250** DN300 20 DN350 15 10 Q [l/s] 30 40 60 80100 4 5 6 7 8 10



DN40 -

60 Hz



[lmp.g.p.m.] 20 30 40 60 80100 200 300 400 600 1000 2000 4000 6000 10000 [Us.g.p.m.] 20 30 40 60 80100 200 300 400 600 10000 2000 4000 6000 10000


IDEAL FOR

WASTEWATER TRANSPORT

WASTEWATER TREATMENT

INDUSTRY

STORMWATER

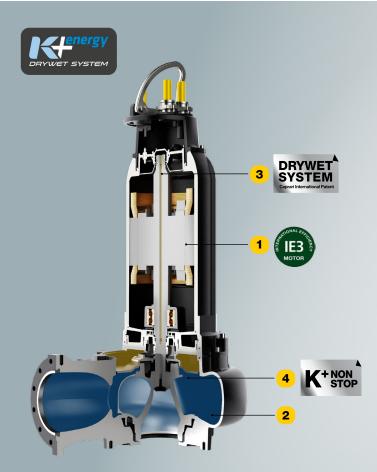

WHY CHOOSE K+ ENERGY

- 1 IE3 ELECTRICAL EFFICENCY CLASS
 - High motor efficiency
 - · Reduced energy costs
- 2 HIGH-EFFICIENCY HYDRAULICS
 - Efficiency above 80%
 - Optimized hydraulic profiles

International Patent

- 3 OIL COOLING SYSTEM
 - S1 operation in dry chamber
 - Maximum versatility of use

4 ANTI-CLOGGING SYSTEM

Exclusive

- The widest free passages in the market
- Maximum operational safety

Discover all the news on the dedicated website www.kenergy.caprari.com



→ DN400

